



AXA PISTON PUMP



DRY-RUN SAFETY AND LEAKAGE RETURN
SYSTEMS (UP TO 5 HOURS)

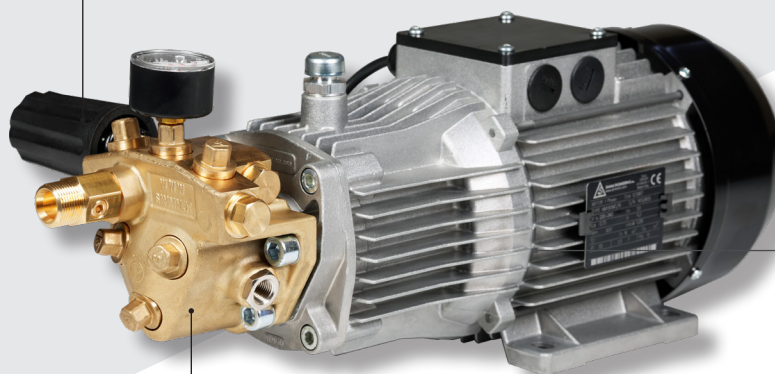


1.450 RPM MOTOR SPEED


AXA BRASS PUMP DOUBLE WATER
SEALS AND COATED CERAMIC
PISTON EFFICIENCY 98%



GEARBOX

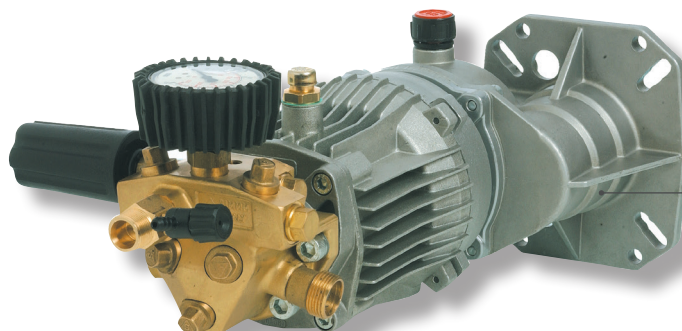


VIDEO



TECHNICAL DATA

- AXA PUMP WITH INTERNATIONAL PATENT
- HIGH EFFICECY UP TO 98%
- DOUBLE WATER SEALS FOR HIGH TEMPERATURE
- INTEGRATED BY-PASS VALVE
- STAINLESS STEEL PLUNGERS WITH CERAMIC COATING
- STAINLESS STEEL VALVES
- SELF-PRIMING PUMP
- DRY-RUN SAFETY AND LEAKAGE RETURN SYSTEMS
- (UP TO 5 HOURS)
- LOW SPEED E1.450 RPM
- PRESSURE UP TO 200 BAR WITH A SINGLE PH. MOTOR
- (230 V. 50/50 HZ.)
- TOTAL STOP DEVICE (OPTIONAL)
- ON/OFF THERMAL SWITCH AND POWER CABLE (OPTIONAL)
- ADJUSTABLE DETERGENT DEVICE (OPTIONAL)
- LARGE PRESSURE GAUGE WITH RUBBER PROTECTION
- LARGE WHEELS FOR EASY TRASNPORTATION
- EASY FRONT CONNECTION
- CE APPROVED



Code	r.p.m	Pressure		Flow rate		Voltage V/ph/Hz.	Motor		Nozzle
		Bar	PSI	l./h	GPM		Hp.	Amps	
AXA100.660	1.450	30÷120	1.450	660	2.9	230/1/50-60	3	10.4	0.50
AXA105.720	1.450	30÷105	1.522	720	3.3	230/1/50-60	3	11.8	0.60
AXA120.660	1.450	30÷120	1.740	660	2.9	230/1/50-60	3	12.1	0.45
AXA130.630	1.450	30÷130	1.885	360	2.8	230/1/50-60	3	12.8	0.40
AXA130.660	1.450	30÷130	1.885	660	2.9	230/1/50-60	3	13.8	0.40
AXA150.600	1.450	30÷150	2.170	600	2.6	230/1/50-60	3	13.8	0.35
AXA200.420	1.450	30÷200	2.900	420	1.9	230/1/50-60	3	13.8	0.20
AXA160.900	1.450	30÷160	2.320	900	4.0	400/3/50-60	4	7.5	0.50
AXA185.780	1.450	30÷185	2.680	780	3.0	400/3/50-60	4	7.5	0.30
AXA200.660	1.450	30÷200	2.900	660	2.9	400/3/50-60	4	7.5	0.35
AXA200.900	1.450	30÷200	2.900	900	4.0	400/3/50-60	5.5	9.4	0.45

Code	r.p.m	Pressure		Flow rate		Power Hp.	Gear Ratio
		Bar	PSI	l./h	GPM		
AXA150.720R	1.750*	30÷150	2.175	720	3.1	5.5	2.3:1
AXA200.900R	1.750*	30÷200	2.900	900	3.9	11	2.176:1