


POWER GUN



GENERAL FEATURES

- AXA pump with international patent
- High efficiency up to 98%
- Stainless steel plungers with ceramic coating
- Self-priming pump
- Easy pump maintenance
- Dry-run safety and leakage return systems (up to 5 hours)
- Double water seals for high temperature
- Integrated by-pass valve for pressure regulation
- Stainless steel valves
- Water tank (optional)
- Inlet 3/4" F
- Outlet M22 x 1,5
- Adjustable detergent device
- Large pressure gauge with rubber protection (diam. 63 mm)
- Motor 1.450 rpm - electric low speed
- Pressure up to 200 bar with a single phase motor (230 V. 50 Hz.)
- On/Off thermal switch protection
- Total stop device
- Large wheels for easy transportation
- Easy front connection
- Professional use
- CE approved



TECHNICAL FEATURES

Code	r.p.m	Pressure		Flow rate		Voltage V/ph/Hz.	Motor		Nozzle
		Bar	PSI	l./h	GPM		Hp.	Amps	
PG100.660	1.450	30÷100	1.450	660	2.9	230/1/50-60	3	10.4	0.50
PG105.720	1.450	30÷105	1.522	720	3.3	230/1/50-60	3	11.8	0.60
PG120.660	1.450	30÷120	1.740	660	2.9	230/1/50-60	3	12.1	0.45
PG130.630	1.450	30÷130	1.885	630	2.8	230/1/50-60	3	12.8	0.40
PG130.660	1.450	30÷130	1.885	660	2.9	230/1/50-60	3	13.8	0.40
PG150.600	1.450	30÷150	2.170	600	2.6	230/1/50-60	3	13.8	0.35
PG200.420	1.450	30÷200	2.900	420	1.9	230/1/50-60	3	13.8	0.20
PG160.900	1.450	30÷160	2.320	900	4.0	400/3/50-60	4	7.5	0.50
PG185.780	1.450	30÷185	2.680	780	3.4	400/3/50-60	4	7.5	0.30
PG200.660	1.450	30÷200	2.900	660	2.9	400/3/50-60	4	7.5	0.35
PG200.900	1.450	30÷200	2.900	900	4.0	400/3/50-60	5.5	9.4	0.45

STANDARD EQUIPMENT



Gun with swivel joint

[illegible]

Vario let Lance

[illegible]

Fan shape lance

[illegible]

High pressure base

[illegible]

Multireg nozzle

[illegible]


Fan shape nozzle

[illegible]

ACCESSORIES



Lance with rotating nozzle

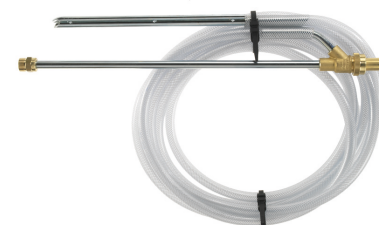[illegible]

Sand/Soda blasting lance kit

[illegible]

Rotating brush

[illegible]

Foam lance with regulator

[illegible]

Drain Nozzle

[illegible]