POWER JET

10 YEAR WARRANTY

MADE IN ITALY

RPM 1.450

70 °C

TOTAL STOP

Shock Resistance

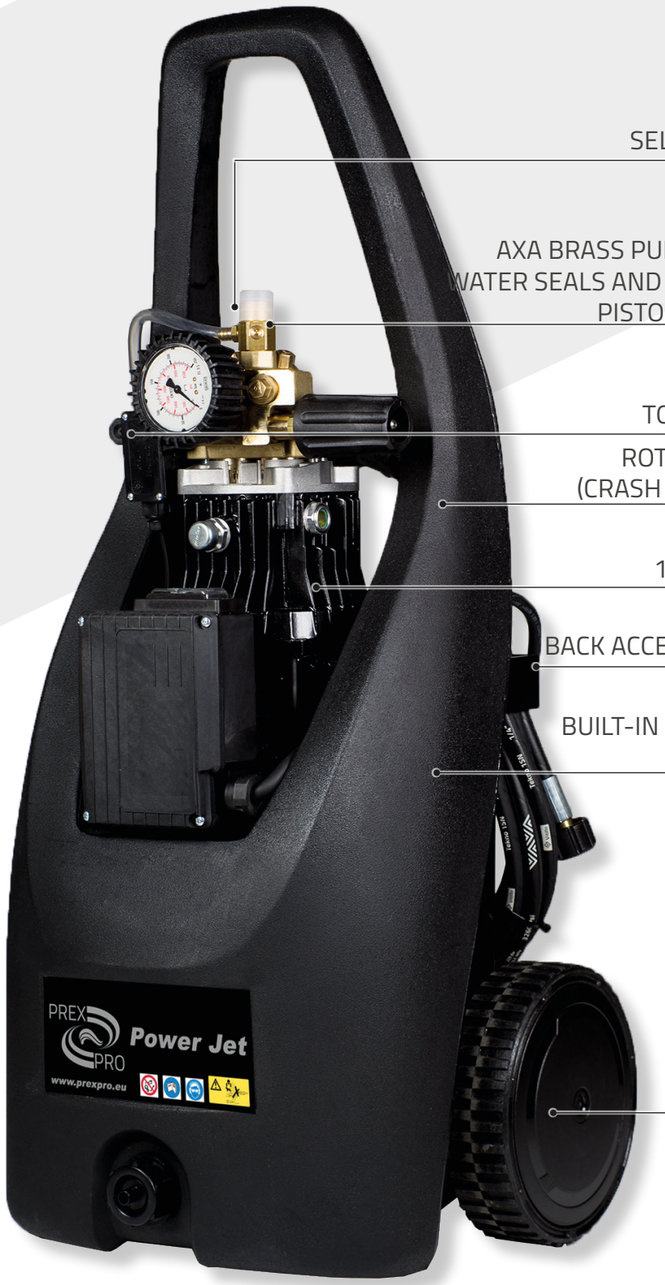

SELF PRIMING PUMP

AXA BRASS PUMP WITH DOUBLE WATER SEALS AND COATED CERAMIC PISTON EFFICIENCY 98%

TOTAL STOP DEVICE

ROTO-MOLD CHASSIS (CRASH AND FIRE PROOF)

1.450 RPM MOTOR

BACK ACCESSORIES HOLDER

BUILT-IN 12 LT DETERGENT TANK

LARGE WHEELS

GENERAL FEATURES

- AXA pump with international patent
- High efficiency up to 98%
- Stainless steel plungers with ceramic coating
- Self-priming pump
- Easy pump maintenance
- Dry-run safety and leakage return systems (up to 5 hours)
- Double water seals for high temperature
- Integrated by-pass valve for pressure regulation
- Stainless steel valves
- Inlet 3/4" F
- Outlet M22 x 1,5
- Adjustable detergent device
- Large pressure gauge with rubber protection (diam. 63 mm)
- Motor 1.450 rpm - electric low speed
- Pressure up to 200 bar with a single phase motor (230 V. 50 Hz.)
- On/Off thermal switch protection
- Total stop device
- Roto-mold chassis with built in 12 lt detergent tank
- Large wheels for easy transportation
- Easy front connection
- Professional use
- CE approved

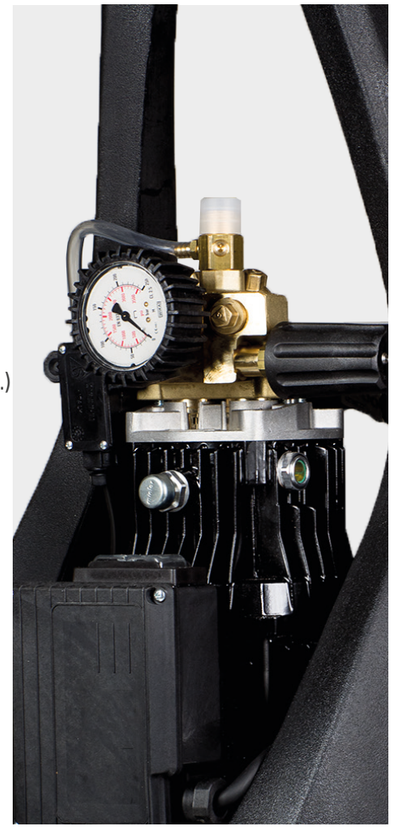

TECHNICAL FEATURES

Code	r.p.m	Pressure		Flow rate		Voltage	Motor		Nozzle
		Bar	PSI	l./h	GPM	V/ph/Hz.	Hp.	Amps	
PJ100.660	1.450	30÷100	1.450	660	2.9	230/1/50-60	3	10.4	0.50
PJ105.720	1.450	30÷105	1.522	720	3.3	230/1/50-60	3	11.8	0.60
PJ120.660	1.450	30÷120	1.740	660	2.9	230/1/50-60	3	12.1	0.45
PJ130.630	1.450	30÷130	1.885	630	2.8	230/1/50-60	3	12.8	0.40
PJ130.660	1.450	30÷130	1.885	660	2.9	230/1/50-60	3	13.8	0.40
PJ150.600	1.450	30÷150	2.170	600	2.6	230/1/50-60	3	13.8	0.35
PJ200.420	1.450	30÷200	2.900	420	1.9	230/1/50-60	3	13.8	0.20
PJ160.900	1.450	30÷160	2.320	900	4.0	400/3/50-60	4	7.5	0.50
PJ185.780	1.450	30÷185	2.680	780	3.4	400/3/50-60	4	7.5	0.30
PJ200.660	1.450	30÷200	2.900	660	2.9	400/3/50-60	4	7.5	0.35
PJ200.900	1.450	30÷200	2.900	900	4.0	400/3/50-60	5.5	9.4	0.45

STANDARD EQUIPMENT

Gun with swivel joint

Technical features				Compatible models										
l/min	IN	OUT	Code	PJ100.660	PJ105.720	PJ120.660	PJ130.630	PJ130.660	PJ150.600	PJ200.420	PJ160.900	PJ185.780	PJ200.660	PJ200.900
30	G 3/8 M	M22x1.5 F	03.428.2	■	■	■	■	■	■	■	■	■	■	■

Vario Jet Lance

TECHNICAL FEATURES				COMPATIBLE MODELS										
IN	OUT	mm	Code	PJ100.660	PJ105.720	PJ120.660	PJ130.630	PJ130.660	PJ150.600	PJ200.420	PJ160.900	PJ185.780	PJ200.660	PJ200.900
M22x 1.5 M	M4	465	03.429	■	■	■	■	■	■	■				

Fan shape Lance

TECHNICAL FEATURES				Compatible models										
IN	OUT	mm	Code	PJ100.660	PJ105.720	PJ120.660	PJ130.630	PJ130.660	PJ150.600	PJ200.420	PJ160.900	PJ185.780	PJ200.660	PJ200.900
M22x 1.5 M	1/4 NPT F	465	03.431								■	■	■	■

High pressure hose

TECHNICAL FEATURES				COMPATIBLE MODELS										
IN	OUT	m	Code	PJ100.660	PJ105.720	PJ120.660	PJ130.630	PJ130.660	PJ150.600	PJ200.420	PJ160.900	PJ185.780	PJ200.660	PJ200.900
M22x1.5 F	M22x1.5 F	8 - R1 1/4"	04.454.3	■	■	■	■	■	■	■	■	■	■	■

Multireg nozzle

TECHNICAL FEATURES				COMPATIBLE MODELS										
Material	ø	Connection	Code	PJ100.660	PJ105.720	PJ120.660	PJ130.630	PJ130.660	PJ150.600	PJ200.420	PJ160.900	PJ185.780	PJ200.660	PJ200.900
Inox AISI 303	0,94	M4	03.432.094							■				
Inox AISI 303	1,20	M4	03.432.120				■	■	■					
Inox AISI 303	1,30	M4	03.432.130			■								
Inox AISI 303	1,40	M4	03.432.140	■										
Inox AISI 303	1,50	M4	03.432.150		■									

Fan shape nozzle

TECHNICAL FEATURES				COMPATIBLE MODELS										
Connection	ø	Angle	Code	PJ100.660	PJ105.720	PJ120.660	PJ130.630	PJ130.660	PJ150.600	PJ200.420	PJ160.900	PJ185.780	PJ200.660	PJ200.900
1/4 NPT M	0,30	15°	03.433.30									■		
1/4 NPT M	0,35	15°	03.433.35										■	
1/4 NPT M	0,45	15°	03.433.45											■
1/4 NPT M	0,50	15°	03.433.50								■			

ACCESSORIES

Lance with rotating nozzle

TECHNICAL FEATURES				COMPATIBLE MODELS										
IN	mm	ø	Code	PJ100.660	PJ105.720	PJ120.660	PJ130.630	PJ130.660	PJ150.600	PJ200.420	PJ160.900	PJ185.780	PJ200.660	PJ200.900
M22x1,5 M	465	020	03.482.20							■				
M22x1,5 M	465	030	03.482.30									■		
M22x1,5 M	465	035	03.482.35						■				■	
M22x1,5 M	465	040	03.482.40				■	■						
M22x1,5 M	465	045	03.482.45			■								■
M22x1,5 M	465	050	03.482.50	■							■			
M22x1,5 M	465	060	03.482.60		■									



Sand/Soda blasting lance kit

TECHNICAL FEATURES				COMPATIBLE MODELS										
IN	mm	ø	Code	PJ100.660	PJ105.720	PJ120.660	PJ130.630	PJ130.660	PJ150.600	PJ200.420	PJ160.900	PJ185.780	PJ200.660	PJ200.900
M22x1,5 M	500	012	03.486.12				■	■	■			■	■	■
M22x1,5 M	500	013	03.486.13			■								
M22x1,5 M	500	014	03.486.14	■							■			
M22x1,5 M	500	015	03.486.15		■									

Rotating brush

TECHNICAL FEATURES				COMPATIBLE MODELS										
IN	bar	l/min	Code	PJ100.660	PJ105.720	PJ120.660	PJ130.630	PJ130.660	PJ150.600	PJ200.420	PJ160.900	PJ185.780	PJ200.660	PJ200.900
M22x1,5 M	30	20	03.493.3	■	■	■	■	■	■	■	■	■	■	■

Foam lance, with regulator

TECHNICAL FEATURES				COMPATIBLE MODELS										
IN	ø	l/min	Code	PJ100.660	PJ105.720	PJ120.660	PJ130.630	PJ130.660	PJ150.600	PJ200.420	PJ160.900	PJ185.780	PJ200.660	PJ200.900
M22x1,5 M	1,25	20	03.499	■	■	■	■	■	■	■	■	■	■	■

Drain Nozzle

TECHNICAL FEATURES				COMPATIBLE MODELS										
IN	m	l/h	Code	PJ100.660	PJ105.720	PJ120.660	PJ130.630	PJ130.660	PJ150.600	PJ200.420	PJ160.900	PJ185.780	PJ200.660	PJ200.900
M22x1,5 M	15	360 - 900	03.491.3	■	■	■	■	■	■		■	■		
M22x1,5 M	15	360 - 900	03.491.3.A							■			■	■